

## Dingo Cement Pty Ltd

Unit 8 27-35 Huntingdale Rd  
Burwood 3125 Victoria Australia  
Phone: +61 3 8080 1420



[www.dingocement.com.au](http://www.dingocement.com.au)

## Product Data Sheet

# Dingo Bitumen

### Features & Benefits

This product is specifically engineered to remain somewhat pliable following application, allowing the product to eliminate small voids and crevices during the compaction process.

### Applications

- Pot Holes
- Driveways
- General repairs
- Footpaths
- Can be applied over a well compacted base or concrete

### Coverage

3 x 20kg bags (60kg) = 1m<sup>2</sup> with a depth of 23mm.

### Curing

Dingo Bitumen hardens slowly as the bonding agent dries out. This progresses over several weeks depending upon application and weather conditions. During this period scuffing should be avoided.


Allow up to 6 months before applying driveway sealers or coatings to the repaired area.

### Storage

It is recommended to use the entire contents of the bag once opened.

### Packaging

Dingo Bitumen mix is packaged in handy 10kg plastic bags and 20kg plastic bags.

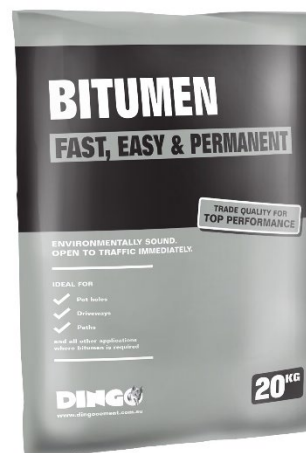

### Usage

1. The area where you intend to use the product must be dry.
2. Remove any weeds and plant material.
3. Base must be thoroughly compacted. Crushed stone is recommended.
4. Apply material evenly, do not exceed 30mm in one application.
5. Leave for a few minutes and then compact using a roller, plate compactor or hand tamper.

### Handy Hints

- A 30mm layer should compact to approx. 25mm.
- For thicknesses greater than 50mm Dingo Bitumen is not recommended.
- Place at ambient temperature then no reheating is required.
- If the bag is firm to touch, leave in a warm place for 30 minutes.
- A light covering of sand is recommended to allow usage straight away.

### Precautions for use

For detailed precautions, please download the SDS from [www.dingocement.com.au](http://www.dingocement.com.au) or call 03 8080 1420. Read the product label carefully before use.